

## OUTLET- Wall Spout

# S6000



### Wall Mounted Fixed Straight Spout with 208.5mm Reach

5 star 6 lpm  
(Nominal Flow : 5.35 lpm)

#### Product Features



- Laminar Flow Available
- Durable Design
- Adaptable to all Gentec tapware
- Product customisation available
- Recommended for any commercial projects

#### Technical Information



Materials	DZR Brass
Inlet	15mm Female (G 1/2" BSP)
Outlet	Aerated Flow
Working Pressures Recommended	50kPa-500kPa
Working Pressures	350kPa
Working Temperatures	5°C - 80°C
Finish / Colour	Chrome Plated
Warranty	2 years*

#### Product Certifications




WELS: TM37302



Unit 6, 20 - 28 Ricketty St, Mascot, NSW 2020 P: +612 9319 4422 F: +612 8088 7635 E: info@gentecaustralia.com.au

Note: The information provided is only a guide, actual product may differ. The information here should not be relied on without clarification with Gentec. Gentec reserves the right to make design changes at any time without notification.

\*Subject to terms and conditions, available at [www.gentecaustralia.com.au/page/warranty](http://www.gentecaustralia.com.au/page/warranty)

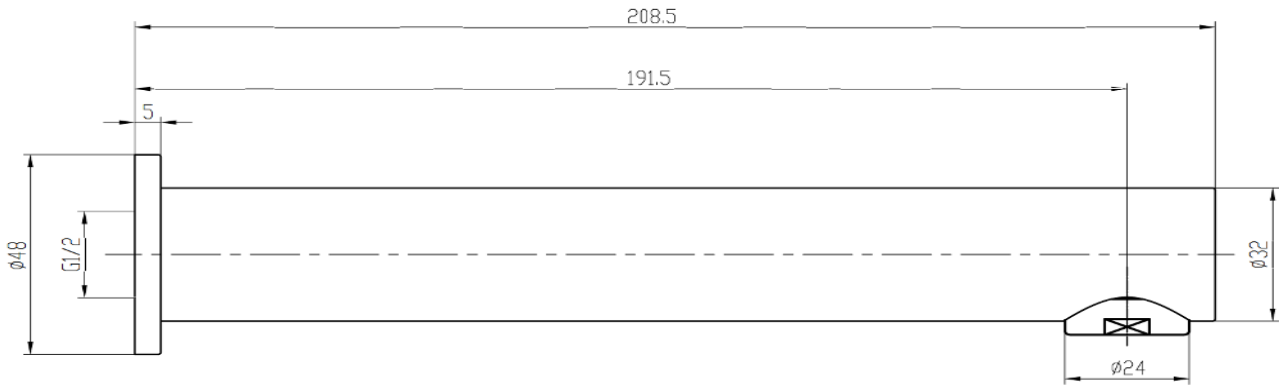

Unit 6, 20 - 28 Ricketty St, Mascot, NSW 2020 P: +612 9319 4422 F: +612 8088 7635 E: info@gentecaustralia.com.au

Note: The information provided is only a guide, actual product may differ. The information here should not be relied on without clarification with Gentec. Gentec reserves the right to make design changes at any time without notification.

\*Subject to terms and conditions, available at [www.gentecaustralia.com.au/page/warranty](http://www.gentecaustralia.com.au/page/warranty)